

**High pressure performance and high volume output with space-saving dimensions.**  
 Specifically designed for direct insertion in duct systems. Various applications in commercial, industrial and residential areas.

**Special features**

- Low space requirement and minimal installation costs due to linear throughflow.
- No need for elaborate deflectors.
- Connectors on inlet and outlet side correspond to standard duct Ø.
- Comes with two performance levels; 100% speed-controllable as standard.
- Can be used in any position.
- Long-life ball bearings, designed for 30000 operating hours.
- Problem-free maintenance and cleaning without dismantling the duct system due to the removable fan unit.
- Fan unit with terminal box can be rotated into any position.
- Integrated mounting bracket for easy installation to walls and ceilings.

**Common features**

**Casing**

The fan unit can be removed from the duct casing with integ-

rated mounting bracket by loosening the clamp. All components are made of impact-resistant and corrosion-resistant plastic. Colour: Light grey.

**Power control**

With two performance levels as standard using an external operating switch MVB (accessories). Also with continuously variable control through electronic controller or five-step transformer.

**Motor**

Enclosed, ball bearing mounted motor with humidity protection, insulation class F, for continuous operation, maintenance-free and radio interference-free.

**Motor protection**

Through thermal overload protection in the winding.

**Noise**

See right page.

**Description MV**

**Impeller**

Optimised for high pressure performance and volume output, made of high-quality plastic.

**Electrical connection**

Spacious terminal box (IP44) on

outside of casing; can be rotated into any position.

**Installation**

No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

**Description MVZ**

Two MV fans arranged in series, connected by a sleeve and mounted on a shared base plate. Delivered as a ready-to-install kit.

The pressure performance is approximately doubled through series operation.

**Impeller**

As described on the left.

**Electrical connection**

Each fan is equipped with its own terminal box on the outside of the casing.

A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.

The high performance level must

be connected when using speed controllers.

**Installation**

No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Installation in duct system, preferably away from the room to be ventilated for less noise.

**Description MVP**

Two MV fans arranged in parallel are connected together by inlet and outlet side-mounted rectangular duct connection plates and screwed to mounting rails. Delivered as a ready-to-install kit.

The volume output doubles during parallel operation (joint control).

**Impeller**

As described on the left.

**Power control/Connection**

Each fan is equipped with its own terminal box on the outside of the casing.

A coupling relay must be provided according to the wiring diagram for controlling the two fans at two performance levels via one operating switch MVB (accessories) or one on-site changeover switch.


The high performance level must be connected when using speed controllers.

Each fan can also be individually controlled and connected to the second fan if necessary. In order to prevent backflow in this case, two duct shutters (type RSK, accessories) must be provided on the outlet side.


Type	Ref. no.	Connection Ø	Flow rate min./max.	Speed min./max.	Sound pres. lev at 1m		Power consum. min/max.	Current consum. min/max.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Transformer speed controller 5-step		Electronic* speed controller, cont. variable flush/ surf-mount.	
					Case radiation	Air noise min./max.						Type	Ref. no.	Type	Ref. no.
Single level round duct fan, 230 V, 50 Hz, Capacitor motor, IP44															
MV 160	06054	160	390/550	1520/2290	41/49	57/65	40/58	0.18/0.26	844.1	60	2.3	TSW 0.3	03608	ESU1/ESA1	00236/00238
Double pressure Two level fan unit, 230 V, 50 Hz, Capacitor motor, IP44															
MVZ 160	06061	160	390/550	1520/2290	47/55	59/67	80/116	0.36/0.52	845.1	60	5.8	TSW 1.5	01495	ESU1/ESA1	00236/00238
Double volume Parallel twin unit, 230 V, 50 Hz, Capacitor motor, IP44															
MVP 160	06068	-	780/110	1520/2290	44/52	60/68	80/116	0.36/0.52	845.1	60	7.7	TSW 1.5	01495	ESU1/ESA1	00236/00238

\* Transformer control units must be provided in noise-relevant cases. Electronic phase angle control can cause disturbing magnetisation humming.


**Performance curves MV 160 – Single level**

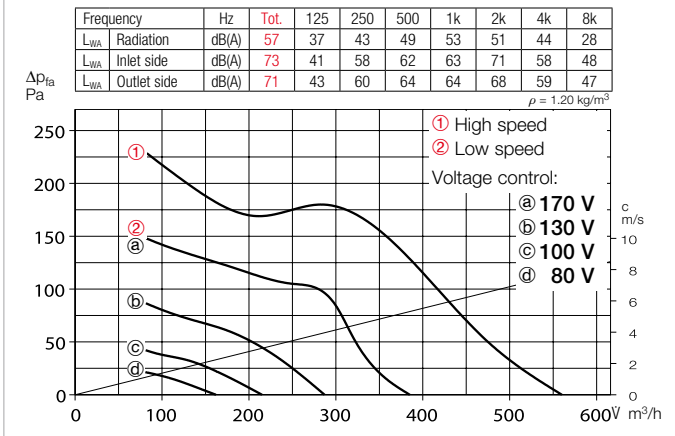

**Performance curves MVZ 160 – Two level**

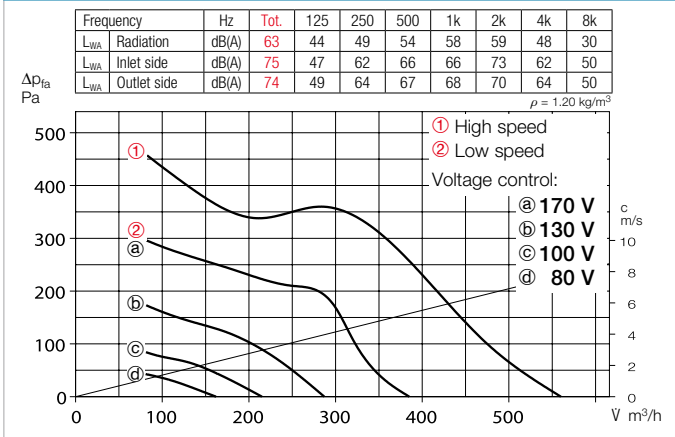

**Performance curves MVP 160 – Parallel**

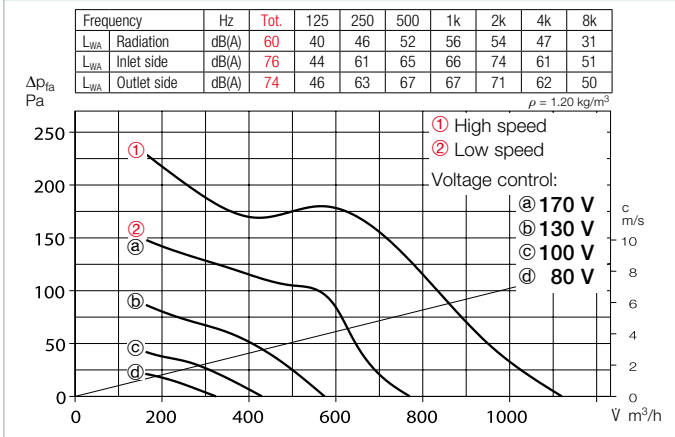

**Noise**

The total level and range are specified above the performance diagram for

- case-radiated sound power.
- Inlet/outlet side sound power in dB(A).
- The case-radiated noise and inlet/outlet side air noise as sound pressure at 1 m (free field conditions) are also specified in the type table.

**Accessory details Page**

Filter, heating elements and silencers	481 ff.
Temperature control systems for heating elements	487, 491 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	561 ff.
Disc valves	582 ff.
Speed controllers, controllers and switches	599 ff.

**Accessories for MV and MVZ**

**Flexible connecting sleeve**

**FM 160** Ref. no. 01684  
Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.  
2 pcs required for inlet and outlet side application.



**External wall shutter**

**VK 160** Ref. no. 00892  
Automatic overpressure shutter for external wall connection of air outlet opening. Made of white plastic.



**External wall cover grille**

**G 160** Ref. no. 00893  
For covering and insertion in round ventilation openings. Made of break-resistant, white plastic.



**Protection grille**

**MVS 160** Ref. no. 06074  
For inlet and outlet side installation on fan.



**Flexible cross talk silencer**

**FSD 160** Ref. no. 00678  
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.



**Air filter box**

**LFBR 160 Coarse 70%\*** 08578  
Large-surface, installation in round duct system.



**Electric heating element**

**EHR-R 1.2/160** 1.2 kW No. 09434  
In duct casing made of galvanised steel sheet.



**Warm water heating element**

**WHR 160** Ref. no. 09481  
For installation in duct system.



**Accessories for all types**

**Duct shutter**

**RSK 160** Ref. no. 05669  
Automatic, made of metal. For installation in pipeline.



**Operating switch 0-1-2**

**MVB** Ref. no. 06091  
With functions On/Off, Low and high speed.



**Transformer speed controller**

**TSW** See type table  
Five-step, for surface installation.



**Electronic speed controller**

**ESU/ESA** See type table  
For flush/surface installation.



**Electronic turn-off delay switch**

**ZNE** Ref. no. 00342  
With continuously variable turn-off delay periods.

\* See product page for detailed description