

Technical Data Sheet

CODE 11122

MF 90/3,5"

Wall axial fans



Certifications





CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II ^o	Weight (Kg)	0,50
IP	X4	giri_minuto	2500
Max absorbed current (A)	0,08	Max airflow (l/s)	18
Max absorbed power (W)	14	Max airflow (m ³ /h)	65
Max ambient temperature for continuous operation (°C)	50	Max pressure (mmH2O)	2,5
Nominal diameter (mm)	90	Max pressure (Pa)	25
Ø Discharge hole (mm)	92,5	RPM	2500
		Sound pressure Lp [dB (A)] at 3 m	28,8

DIMENSIONS

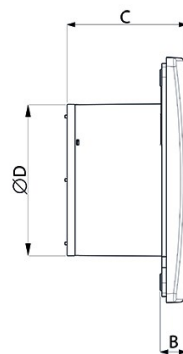

Size A (mm)	159
Size B (mm)	17
Size C (mm)	77
Size D (mm)	92,5

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11122

MF 90/3,5"


Wall axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m³/h.
- Non-return damper fitted to outlet port.
- Vortice speed controller.

CURVES

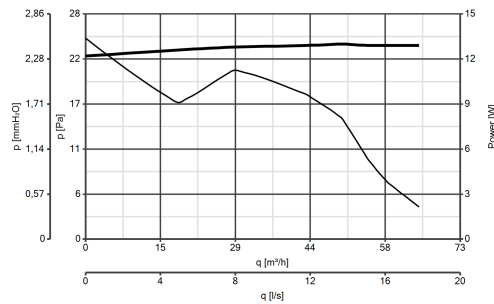

ACCESSORIES




C 1.5
(COMANDO EL.
1.5 A)

Code 12966



KIT SCB
(TRASF.E.C.)

Code 22481



SF 90-100

Code 22162

ITALY

Pre Sales:
prevendita@vortice-italy.com

After Sales:
postvendita@vortice-italy.com

PER INFORMAZIONI /
FOR INFORMATION

UNITED KINGDOM & REP. OF
IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com