

Technical Data Sheet

CODE 11698

M 150/6" AT HCS LL

Wall/window axial fans



Certifications

CE CE


EAC EAC

CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	1,1
IP	X4	Max airflow (l/s)	93,1
Max absorbed current (A)	0,15	Max airflow (m ³ /h)	335
Max absorbed power (W)	29	Max pressure (mmH ₂ O)	6
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	59
Nominal diameter (mm)	160	RPM	2100
∅ Discharge hole (mm)	156	Sound pressure Lp [dB (A)] at 3 m	46

DIMENSIONS

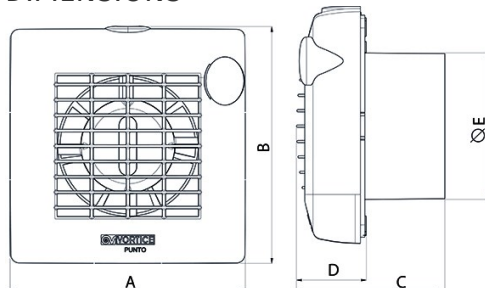

Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	∅
	156

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11698

M 150/6" AT HCS LL

Wall/window axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m³/h.
- Electronic pcb with humidostat function piloted by RH sensor (4

preset thresholds: 60%, 70%, 80%, 90%, selectable during installation), designed to switch on the fan automatically. The pcb incorporates an electronic timer that shuts off the motor automatically when relative humidity returns below the threshold value. The timer setting is selectable during installation in the range 3'-20' (default setting 3').

- Equipped with system by which the louvres of the grille are opened and closed automatically.

CURVES

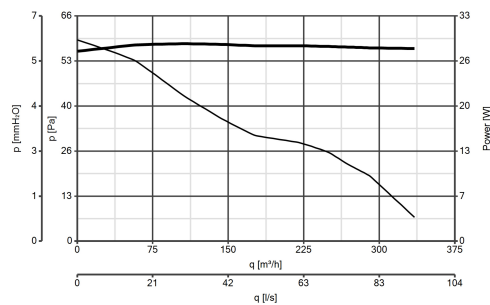

ACCESSORIES



F 150/6"

Code 22133



S 150/6

Code 22156

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com