

Technical Data Sheet

CODE 11402

M 150/6" LL

Wall/window axial fans



Certifications

CE CE

EAC EAC

G-Mark G-Mark


UKCA UKCA

CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	1,1
IP	X4	Max airflow (l/s)	93,1
Max absorbed current (A)	0,15	Max airflow (m³/h)	335
Max absorbed power (W)	29	Max pressure (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	59
Nominal diameter (mm)	160	RPM	2100
Ø Discharge hole (mm)	156	Sound pressure Lp [dB (A)] at 3 m	46

DIMENSIONS

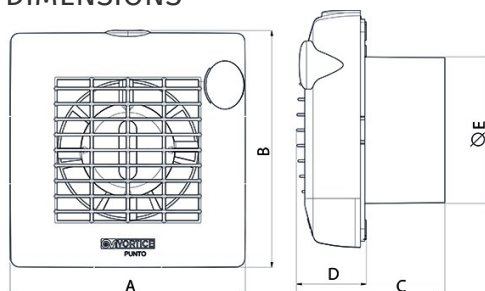

Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	Ø
	156

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11402

M 150/6" LL


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m³/h.
- Vortice speed controller.

CURVES

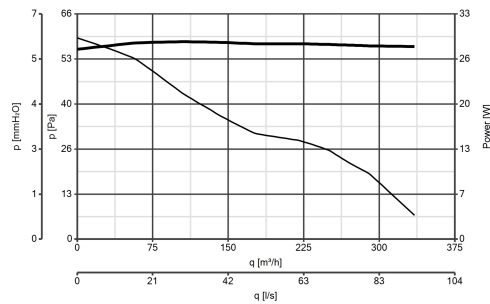

ACCESSORIES



S 150/6

Code 22156



SCNRB I

Code 12971



C 1.5

**(COMANDO EL.
1.5 A)**

Code 12966



KIT SCB (TRASF.E.C.)

Code 22481



F 150/6"

Code 22133

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com