

Range of large diameter portable cooling fans specially designed to offer a powerful and uniform distribution of air. The series is composed by two floor models, of 350 mm and 450 mm diameter and a column model of 450 mm. 3 speed controller and carrying handle included.

### Applications

Domestic, commercial and industrial clean environments and cleanroom conditions.

- Ventilation applications in assembly and storage areas.
- Ventilation of one or several rooms in residential dwellings, offices and retail outlets.
- Engine, compressor and transformer cooling.
- Paint line drying applications.
- Heat dissipation in workplaces.



TURBO-455 CN PLUS




TURBO-355 N  
TURBO-405 N  
TURBO-455 N PLUS



Speed Controller.  
Carrying handle.



Adjustable fan position.  
Proof guard (detachable).

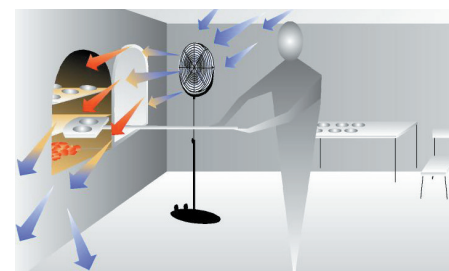

Heat dissipation in the workplace.

### TECHNICAL CHARACTERISTICS

Model	Voltage 50Hz (V)	Nominal power (W)	Airflow* (m³/h)	Maximum air output speed (m/s)	Maximum sound power level (dB(A))	Nº speeds	Motor with thermal protection	Colour	Weight (kg)	Ø Impeller (mm)	Cable length (mm)	Dimensions LxWxH (mm)
TURBO-355 N	230	55	3.120/1.860/1.020	6,6/5,7/4,8	51/48/44	3	•	Chrome	3,7	360	1.500	460x170x430
TURBO-405 N	230	65	3.840/2.280/1.320	6,3/5,4/4,4	55/52/48	3	•	Chrome	4,2	400	1.500	510x180x485
TURBO-455 N PLUS	230	110	7.440/5.520/3.540	8,6/7,0/5,7	60/57/55	3	•	Chrome	5,5	450	1.500	560x190x550
TURBO-455 CN PLUS	230	110	7.440/5.520/3.540	8,6/7,0/5,7	60/57/55	3	•	Chrome	9,6	450	1.500	560xØ505x1300-1550

\* The indicated airflow include induced airflow.

\*\* See section of Wiring Diagrams.

\*\*\*According to IEC 60879 regulation