

# Technical Data Sheet

CODE 11940

## MICRO 100 T

Centrifugal duct fans



### Certifications




IMQ Performance



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (l/s)	18
Insulation class	II°	Airflow at 1st speed (m³/h)	65
IP	X4	Max airflow at Max speed (l/s)	25
Max absorbed current at Max speed (A)	0,13	Max airflow at Max speed (m³/h)	90
Max absorbed current at Min speed (A)	0,10	Max pressure at Max speed (mmH2O)	22
Max absorbed power at Max speed (W)	28	Max pressure at Max speed (Pa)	216
Max ambient temperature for continuous operation (°C)	50	Max RPM	1600
Nominal diameter (mm)	100	Min RPM	1180
Ø Discharge hole (mm)	92,5/97	Pressure at 1st speed (mmH2O)	16
Power absorbed at 1st speed (W)	20	Pressure at 1st speed (Pa)	157
Voltage (V)	220-240	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	32,3
Weight (Kg)	1,82	Sound pressure at 3m at Max speed Lp [dB (A)]	39,2
		Sound pressure in free air conditions [dB(A)] 3m	32,3

### DIMENSIONS

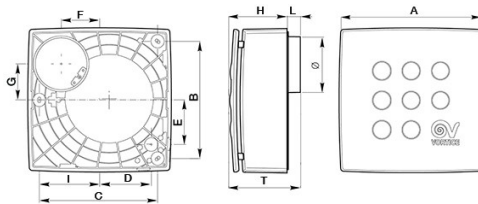

Size A (mm)	239
Size B (mm)	195
Size C (mm)	197
Size D (mm)	85
Size E (mm)	74
Size F (mm)	64
Size G (mm)	60
Size H (mm)	97
Size I (mm)	100
Size L (mm)	20
Size T (mm)	117

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

# Technical Data Sheet

CODE 11940

## MICRO 100 T

Centrifugal duct fans



### DESCRIPTION

- Material: white ABS plastic
  - Capacitor start 2-speed induction motor coupled to a forward bladed centrifugal impeller. Equipped with thermal overload cutout and self-lubricating bushings.
  - Nominal diameter 100 mm.
  - Minimum air flow 65 m<sup>3</sup>/h
- Maximum air flow: 90 m<sup>3</sup>/h
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
  - IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

□

### ACCESSORIES



#### DEVIATORE DI FLUSSO M 10/4

Code 22310

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)  
After Sales:  
[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### OTHER COUNTRIES

Sales Dept:  
[export@vortice-italy.com](mailto:export@vortice-italy.com)  
After Sales:  
[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)

#### UNITED KINGDOM & REP. OF

#### IRELAND

Sales Dept:  
[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)  
Technical Dept:  
[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)