

Technical Data Sheet

CODE 11124

MF 120/5"

Wall axial fans



Certifications



CE



CCC



EAC



G-Mark



UKCA





CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|-----------------|-----------------------------------|---------|
| Frequency (Hz) | 50 | Voltage (V) | 220-240 |
| Insulation class | II ^o | Weight (Kg) | 0,61 |
| IP | X4 | Max airflow (l/s) | 49 |
| Max absorbed current (A) | 0,12 | Max airflow (m ³ /h) | 175 |
| Max absorbed power (W) | 20 | Max pressure (mmH2O) | 5 |
| Max ambient temperature for continuous operation (°C) | 50 | Max pressure (Pa) | 49 |
| Nominal diameter (mm) | 120 | RPM | 2150 |
| Ø Discharge hole (mm) | 119 | Sound pressure Lp [dB (A)] at 3 m | 34,4 |

DIMENSIONS

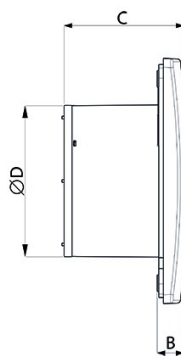

| | |
|-------------|-----|
| Size A (mm) | 179 |
| Size B (mm) | 17 |
| Size C (mm) | 89 |
| Size D (mm) | 119 |

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11124

MF 120/5"


Wall axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m³/h.
- Non-return damper fitted to outlet port.
- Vortice speed controller.

CURVES

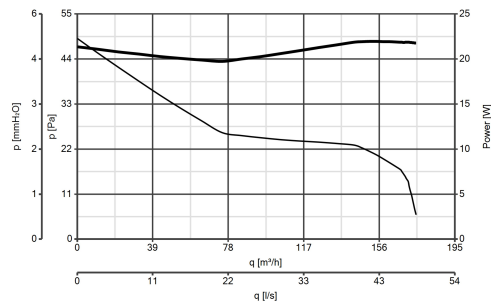

ACCESSORIES




C 1.5 (COMANDO EL. 1.5 A)

Code 12966



KIT SCB (TRASF.E.C.)

Code 22481



SF 120

Code 22163

ITALY

Pre Sales:
prevendita@vortice-italy.com

After Sales:
postvendita@vortice-italy.com

PER INFORMAZIONI /
FOR INFORMATION

UNITED KINGDOM & REP. OF
IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com