

# Technical Data Sheet

CODE 11526

## QE 60 LL T

Centrifugal duct fans



### Certifications

CE CE

TUV TUV


DIBt DIBt

CB TEST CERTIFICATE

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	2,33
IP	45	Max airflow at Max speed (l/s)	16,7
Max absorbed current at Max speed (A)	0,14	Max airflow at Max speed (m³/h)	60
Max absorbed power at Max speed (W)	16	Max pressure at Max speed (mmH2O)	35
Max ambient temperature for continuous operation (°C)	50	Max pressure at Max speed (Pa)	343
Nominal diameter (mm)	80	Max RPM	1170
Ø Discharge hole (mm)	70	Sound power at Min speed LWA [dB(A)]	43
		Sound pressure at 3m at Max speed Lp [dB (A)]	25,5

### DIMENSIONS

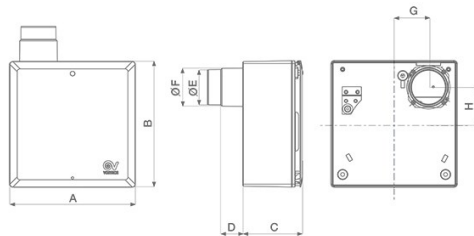

Size A (mm)	262
Size B (mm)	262
Size C (mm)	115,5
Size D (mm)	80
Size E (mm)	73
Size F (mm)	79
Size G (mm)	71,5
Size H (mm)	90

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND  
Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com

# Technical Data Sheet

CODE 11526

## QE 60 LL T


Centrifugal duct fans



### DESCRIPTION

- Scroll and front panel made of self-extinguishing ABS, rated V0.
- Motor housing and filter frame made of ABS plastic.
- 1 speed AC motor, shaft on ball bearings, coupled to a forward curved centrifugal impeller, PBT made.
- Nominal airflow: 60 m<sup>3</sup>/h
- G2 filter, with a clogged filter mechanic alarm fully compliant with ErP reg. N° 1253/2014/UE, in force since 1st January 2018.
- The switching on/off of the extractor fan is realized through the light control; the on-board electronic allows to set, during the installation, the starting/stopping delay when the product is switched on/off (the delay can be set between 0 and 45 seconds and between 0 and 20 minutes).

### CURVES

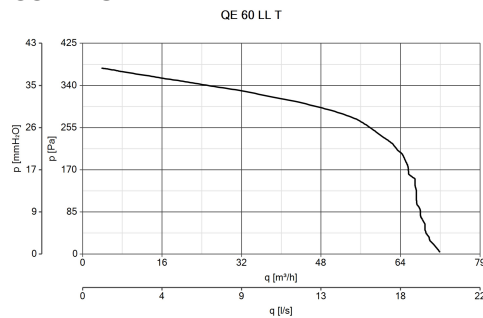

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)  
After Sales:  
[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### UNITED KINGDOM & REP. OF

IRELAND  
Sales Dept:  
[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)  
Technical Dept:  
[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:  
[export@vortice-italy.com](mailto:export@vortice-italy.com)  
After Sales:  
[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)